


ΥΔΡΑΥΛΙΚΟΙ ΚΥΛΙΝΔΡΟΙ ΔΙΠΛΗΣ ΕΝΕΡΓΕΙΑΣ ΧΩΡΙΣ ΑΚΡΑ

max ταχύτητα: 0,5m/s
 Πίεση Λειτουργίας: max 140bar
 Μέγιστη Πίεση: max 250bar
 Θερμοκρασία: -25°C

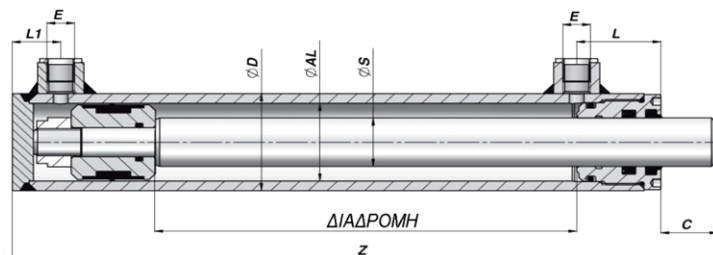


ΚΩΔΙΚΟΣ	ø D	ø AL	ø S	ΔΙΑΔΡΟΜΗ	Z	C	E	L	L1
K-ΔX504020100	50	40	20	100	225	20	1/4" H 3/8"	40	23
K-ΔX504020150				150	275				
K-ΔX504020200				200	325				
K-ΔX504020250				250	375				
K-ΔX504020300				300	425				
K-ΔX504020350				350	475				
K-ΔX504020400				400	525				
K-ΔX504020450				450	575				
K-ΔX504020500				500	625				
K-ΔX504025100	50	40	25	100	225	20	1/4" H 3/8"	40	23
K-ΔX504025150				150	275				
K-ΔX504025200				200	325				
K-ΔX504025250				250	375				
K-ΔX504025300				300	425				
K-ΔX504025350				350	475				
K-ΔX504025400				400	525				
K-ΔX504025450				450	575				
K-ΔX504025500				500	625				
K-ΔX504025550	60	50	25	550	675	20	3/8"	43	26
K-ΔX504025600				600	725				
K-ΔX605025100				100	233				
K-ΔX605025150				150	283				
K-ΔX605025200				200	333				
K-ΔX605025250				250	385				
K-ΔX605025300				300	433				
K-ΔX605025350				350	483				
K-ΔX605025400				400	533				
K-ΔX605025450				450	583				
K-ΔX605025500				500	633				
K-ΔX605025550				550	683				
K-ΔX605025600				600	733				
K-ΔX605025800				800	933				
K-ΔX6050251000				1000	1133				

*Οι διαστάσεις είναι ενδεικτικές και μπορούν να τροποποιηθούν κατόπιν παραγγελίας

ΥΔΡΑΥΛΙΚΟΙ ΚΥΛΙΝΔΡΟΙ ΔΙΠΛΗΣ ΕΝΕΡΓΕΙΑΣ ΧΩΡΙΣ ΑΚΡΑ

max ταχύτητα: 0,5m/s
 Πίεση Λειτουργίας: max 140bar
 Μέγιστη Πίεση: max 250bar
 Θερμοκρασία: -25°C+80°C

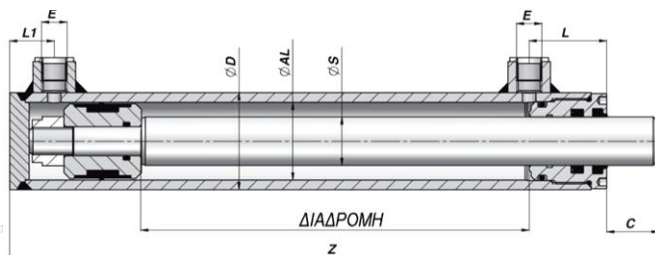


ΚΩΔΙΚΟΣ	ø D	ø AL	ø S	ΔΙΑΔΡΟΜΗ	Z	C	E	L	L1
K-ΔX605030150	60	50	30	150	283	20	1/4"	40	23
K-ΔX605030200				200	333				
K-ΔX605030250				250	385				
K-ΔX605030300				300	433				
K-ΔX605030350				350	483				
K-ΔX605030400				400	533				
K-ΔX605030450				450	583				
K-ΔX605030500				500	633				
K-ΔX605030550				550	683				
K-ΔX605030600				600	733				
K-ΔX605030800				800	933				
K-ΔX6050301000				1000	1133				
K-ΔX706030150	70	60	30	150	302	20	3/8"	50	30
K-ΔX706030200				200	352				
K-ΔX706030250				250	402				
K-ΔX706030300				300	452				
K-ΔX706030350				350	502				
K-ΔX706030400				400	552				
K-ΔX706030450				450	602				
K-ΔX706030500				500	652				
K-ΔX706030550				550	702				
K-ΔX706030600				600	752				
K-ΔX706030800				800	952				
K-ΔX7060301000				1000	1152				
K-ΔX706035200	70	60	35	200	352	20	3/8"	50	30
K-ΔX706035250				250	402				
K-ΔX706035300				300	452				
K-ΔX706035350				350	502				
K-ΔX706035400				400	552				
K-ΔX706035450				450	602				
K-ΔX706035500				500	652				
K-ΔX706035550				550	702				
K-ΔX706035600				600	752				
K-ΔX706035800				800	952				
K-ΔX7060351000				1000	1152				

*Οι διαστάσεις είναι ενδεικτικές και μπορούν να τροποποιηθούν κατόπιν παραγγελίας

ΥΔΡΑΥΛΙΚΟΙ ΚΥΛΙΝΔΡΟΙ ΔΙΠΛΗΣ ΕΝΕΡΓΕΙΑΣ ΧΩΡΙΣ ΑΚΡΑ

max ταχύτητα: 0,5m/s
 Πίεση Λειτουργίας: max 140bar
 Μέγιστη Πίεση: max 250bar
 Θερμοκρασία: -25°C+80°C

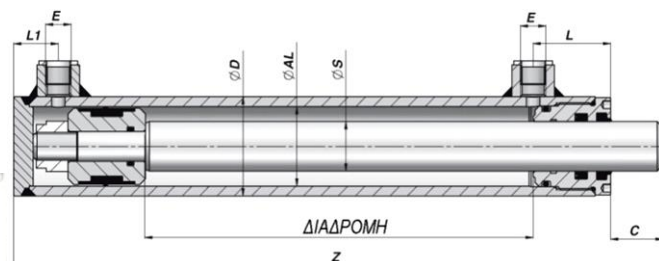


ΚΩΔΙΚΟΣ	ø D	ø AL	ø S	ΔΙΑΔΡΟΜΗ	Z	C	E	L	L1
K-ΔX706040200	70	60	40	200	352	20	3/8"	50	30
K-ΔX706040250				250	402				
K-ΔX706040300				300	452				
K-ΔX706040350				350	502				
K-ΔX706040400				400	552				
K-ΔX706040450				450	602				
K-ΔX706040500				500	652				
K-ΔX706040550				550	702				
K-ΔX706040600				600	752				
K-ΔX706040800				800	952				
K-ΔX7060401000				1000	1152				
K-ΔX807035100	80	70	35	100	252	20	3/8"	50	30
K-ΔX807035150				150	302				
K-ΔX807035200				200	352				
K-ΔX807035250				250	402				
K-ΔX807035300				300	452				
K-ΔX807035350				350	502				
K-ΔX807035400				400	552				
K-ΔX807035450				450	602				
K-ΔX807035500				500	652				
K-ΔX807035550				550	702				
K-ΔX807035600				600	752				
K-ΔX807035800				800	952				
K-ΔX8070351000				1000	1152				
K-ΔX807040200	80	70	40	200	352	20	3/8"	50	30
K-ΔX807040250				250	402				
K-ΔX807040300				300	452				
K-ΔX807040350				350	502				
K-ΔX807040400				400	552				
K-ΔX807040450				450	602				
K-ΔX807040500				500	652				
K-ΔX807040550				550	702				
K-ΔX807040600				600	752				
K-ΔX807040800				800	952				
K-ΔX8070401000				1000	1152				

*Οι διαστάσεις είναι ενδεικτικές και μπορούν να τροποποιηθούν κατόπιν παραγγελίας


ΥΔΡΑΥΛΙΚΟΙ ΚΥΛΙΝΔΡΟΙ ΔΙΠΛΗΣ ΕΝΕΡΓΕΙΑΣ ΧΩΡΙΣ ΑΚΡΑ

max ταχύτητα: 0,5m/s
 Πίεση Λειτουργίας: max 140bar
 Μέγιστη Πίεση: max 250bar
 Θερμοκρασία: -25°C+80°C

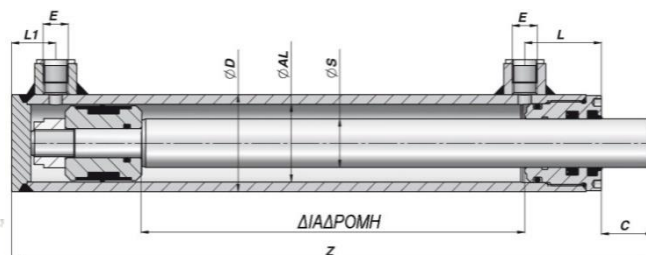


ΚΩΔΙΚΟΣ	Ø D	Ø AL	Ø S	ΔΙΑΔΡΟΜΗ	Z	C	E	L	L1
K-ΔX928040200	92	80	40	200	370	23	1/2"	60	35
K-ΔX928040250				250	420				
K-ΔX928040300				300	470				
K-ΔX928040400				400	570				
K-ΔX928040500				500	670				
K-ΔX928040600				600	870				
K-ΔX928040800				800	970				
K-ΔX9280401000				1000	1170				
K-ΔX928050200	92	80	50	200	370	23	1/2"	60	35
K-ΔX928050250				250	420				
K-ΔX928050300				300	470				
K-ΔX928050400				400	570				
K-ΔX928050500				500	670				
K-ΔX928050600				600	870				
K-ΔX928050800				800	970				
K-ΔX9280501000				1000	1170				

*Οι διαστάσεις είναι ενδεικτικές και μπορούν να τροποποιηθούν κατόπιν παραγγελίας

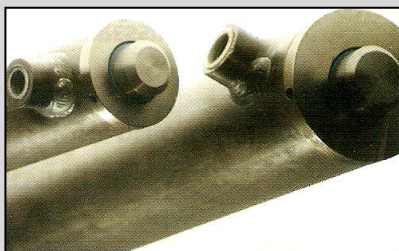

ΥΔΡΑΥΛΙΚΟΙ ΚΥΛΙΝΔΡΟΙ ΔΙΠΛΗΣ ΕΝΕΡΓΕΙΑΣ ΜΕ ΑΚΡΑ

max ταχύτητα: 0,5m/s
 Πίεση Λειτουργίας: max 140bar
 Μέγιστη Πίεση: max 250bar
 Θερμοκρασία: -25°C

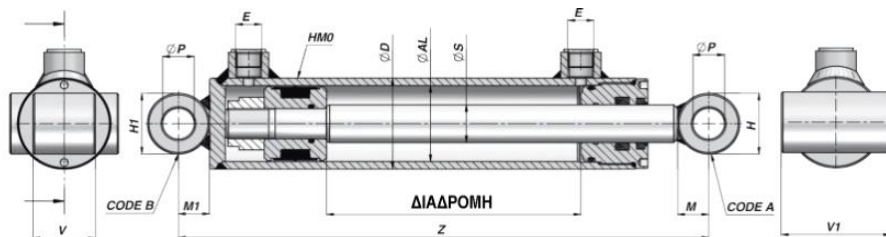


ΚΩΔΙΚΟΣ	ϕD	ϕAL	ϕS	ΔΙΑΔΡΟΜΗ	Z	C	E	L	L1
K-ΔA504025100	50	40	25	100	274	25	3/8"	22	25
K-ΔA504025150				150	324				
K-ΔA504025200				200	374				
K-ΔA504025250				250	424				
K-ΔA504025300				300	474				
K-ΔA504025400				400	574				
K-ΔA504025500				500	674				
K-ΔA504025600				600	774				
K-ΔA504025700				700	874				
K-ΔA504025800				800	974				
K-ΔA605030100	60	50	30	100	282	25	3/8"	22	25
K-ΔA605030150				150	332				
K-ΔA605030200				200	382				
K-ΔA605030250				250	432				
K-ΔA605030300				300	482				
K-ΔA605030400				400	582				
K-ΔA605030500				500	682				
K-ΔA605030600				600	782				
K-ΔA605030700				700	882				
K-ΔA605030800				800	982				
K-ΔA706030100	70	60	30	100	301	25	3/8"	22	25
K-ΔA706030150				150	351				
K-ΔA706030200				200	401				
K-ΔA706030250				250	451				
K-ΔA706030300				300	501				
K-ΔA706030350				350	551				
K-ΔA706030400				400	601				
K-ΔA706030450				450	651				
K-ΔA706030500				500	701				
K-ΔA706030600				600	801				
K-ΔA706030700				700	901				

*Οι διαστάσεις είναι ενδεικτικές και μπορούν να τροποποιηθούν κατόπιν παραγγελίας

ΥΔΡΑΥΛΙΚΟΙ ΚΥΛΙΝΔΡΟΙ ΔΙΠΛΗΣ ΕΝΕΡΓΕΙΑΣ ΜΕ ΑΚΡΑ

max ταχύτητα: 0,5m/s
 Πίεση Λειτουργίας: max 140bar
 Μέγιστη Πίεση: max 250bar
 Θερμοκρασία: -25°C


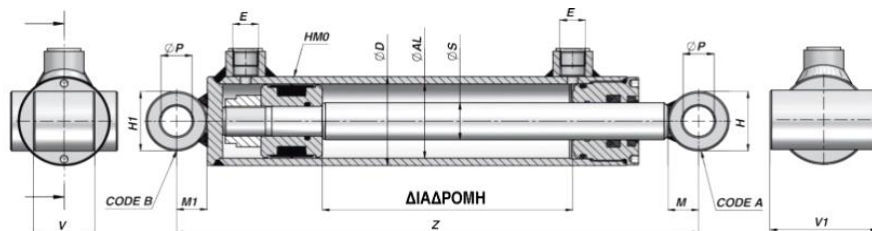


ΚΩΔΙΚΟΣ	Ø D	Ø AL	Ø S	ΔΙΑΔΡΟΜΗ	Z	C	E	L	L1
K-ΔA706035200	70	60	35	200	406	30	3/8"	22	25
K-ΔA706035300				300	506				
K-ΔA706035400				400	606				
K-ΔA706035500				500	706				
K-ΔA706035600				600	806				
K-ΔA706035700				700	906				
K-ΔA807040200	80	70	40	200	406	30	3/8"	22	25
K-ΔA807040250				250	456				
K-ΔA807040300				300	506				
K-ΔA807040350				350	556				
K-ΔA807040400				400	606				
K-ΔA807040450				450	656				
K-ΔA807040500				500	706				
K-ΔA807040600				600	806				
K-ΔA807040700				700	906				
K-ΔA928040200	92	80	40	200	421	30	3/8"	22	25
K-ΔA928040250				250	471				
K-ΔA928040300				300	521				
K-ΔA928040350				350	571				
K-ΔA928040400				400	621				
K-ΔA807040500				500	721				
K-ΔA807040600				600	821				
K-ΔA807040700				700	921				
K-ΔA151050200	115	100	50	200	462	30	3/8"	25	30
K-ΔA151050300				300	562				
K-ΔA151050400				400	662				
K-ΔA151050500				500	762				
K-ΔA151050700				700	962				

*Οι διαστάσεις είναι ενδεικτικές και μπορούν να τροποποιηθούν κατόπιν παραγγελίας

ΥΔΡΑΥΛΙΚΟΙ ΚΥΛΙΝΔΡΟΙ ΔΙΠΛΗΣ ΕΝΕΡΓΕΙΑΣ ΜΕ ΑΓΡΟΤΙΚΑ ΜΠΑΛΑΚΙΑ

max ταχύτητα: 0,5m/s
 Πίεση Λειτουργίας: max 140bar
 Μέγιστη Πίεση: max 250bar
 Θερμοκρασία: -25°C

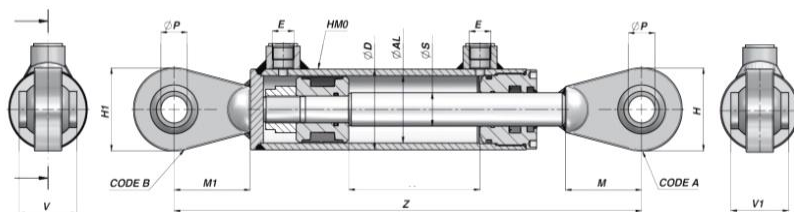


ΚΩΔΙΚΟΣ	ø D	ø AL	ø S	ΔΙΑΔΡΟΜΗ	Z	C	E	L	L1
K-ΔP504025100	50	40	25	100	360	25	3/8"	65	25,4
K-ΔP504025150				150	410				
K-ΔP504025200				200	460				
K-ΔP504025250				250	510				
K-ΔP504025300				300	560				
K-ΔP504025400				400	660				
K-ΔP504025500				500	760				
K-ΔP504025600				600	860				
K-ΔP504025700				700	960				
K-ΔP504025800				800	1060				
K-ΔP605030100	60	50	30	100	368	25	3/8"	65	25,4
K-ΔP605030150				150	418				
K-ΔP605030200				200	468				
K-ΔP605030250				250	518				
K-ΔP605030300				300	568				
K-ΔP605030400				400	668				
K-ΔP605030500				500	768				
K-ΔP605030600				600	868				
K-ΔP605030700				700	968				
K-ΔP605030800				800	1068				
K-ΔP706030100	70	60	30	100	387	25	3/8"	65	25,4
K-ΔP706030150				150	437				
K-ΔP706030200				200	487				
K-ΔP706030250				250	537				
K-ΔP706030300				300	587				
K-ΔP706030350				350	637				
K-ΔP706030400				400	687				
K-ΔP706030450				450	737				
K-ΔP706030500				500	787				
K-ΔP706030600				600	887				
K-ΔP706030700				700	987				

*Οι διαστάσεις είναι ενδεικτικές και μπορούν να τροποποιηθούν κατόπιν παραγγελίας

ΥΔΡΑΥΛΙΚΟΙ ΚΥΛΙΝΔΡΟΙ ΛΙΠΑΝΣΗΣ ΕΝΕΡΓΕΙΑΣ ΜΕ ΑΓΡΟΤΙΚΑ ΜΠΑΛΑΚΙΑ

max ταχύτητα: 0,5m/s
 Πίεση Λειτουργίας: max 140bar
 Μέγιστη Πίεση: max 250bar
 Θερμοκρασία: -25°C

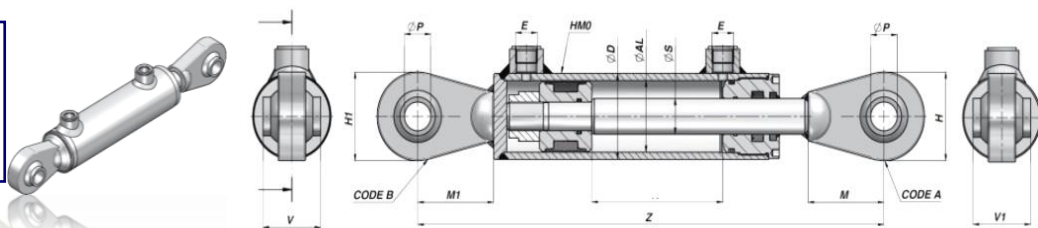


ΚΩΔΙΚΟΣ	ø D	ø AL	ø S	ΔΙΑΔΡΟΜΗ	Z	C	E	L	L1
K-ΔP706035200	70	60	35	200	487	25	3/8"	65	25,4
K-ΔP706035300				300	587				
K-ΔP706035400				400	687				
K-ΔP706035500				500	787				
K-ΔP706035600				600	887				
K-ΔP706035700				700	987				
K-ΔP807040200	80	70	40	200	487	25	3/8"	65	25,4
K-ΔP807040250				250	537				
K-ΔP807040300				300	587				
K-ΔP807040350				350	637				
K-ΔP807040400				400	687				
K-ΔP807040450				450	737				
K-ΔP807040500				500	787				
K-ΔP807040600				600	887				
K-ΔP807040700				700	987				
K-ΔP928040200	92	80	40	200	509	32	3/8"	65	25,4
K-ΔP928040250				250	559				
K-ΔP928040300				300	609				
K-ΔP928040350				350	659				
K-ΔP928040400				400	709				
K-ΔP928040500				500	809				
K-ΔP928040600				600	909				
K-ΔP928040700				700	1009				
K-ΔP151050200	115	100	50	200	554	32	3/8"	70	25,4
K-ΔP151050300				300	654				
K-ΔP151050400				400	754				
K-ΔP151050500				500	854				
K-ΔP151050700				700	1054				

*Οι διαστάσεις είναι ενδεικτικές και μπορούν να τροποποιηθούν κατόπιν παραγγελίας

ΥΔΡΑΥΛΙΚΟΙ ΚΥΛΙΝΔΡΟΙ ΜΟΝΗΣ ΕΝΕΡΓΕΙΑΣ ΧΩΡΙΣ ΑΚΡΑ

max ταχύτητα: 0,5m/s
 Πίεση Λειτουργίας: max 140bar
 Μέγιστη Πίεση: max 250bar
 Θερμοκρασία: -25°C

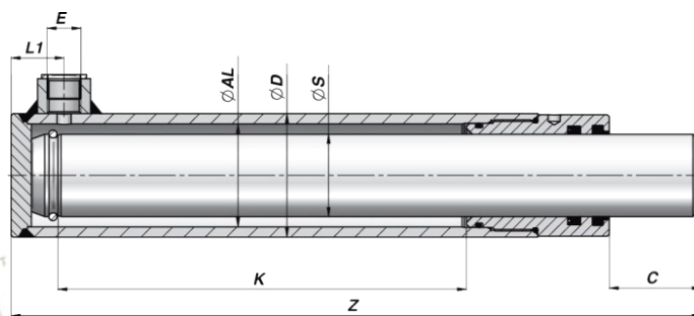


ΚΩΔΙΚΟΣ	ø D	ø AL	ø S	ΔΙΑΔΡΟΜΗ	Z	C	E	L
K-MX504030200	50	40	30	200	330	30	3/8"	23
K-MX504030250				250	380			
K-MX504030300				300	430			
K-MX504030350				350	480			
K-MX504030400				400	530			
K-MX504030500				500	680			
K-MX605040200	60	50	40	200	338	45	3/8"	26
K-MX605040300				300	438			
K-MX605040400				400	538			
K-MX605040500				500	638			
K-MX605040600				600	738			
K-MX706050300	70	60	50	300	450	50	3/8"	30
K-MX706050400				400	550			
K-MX706050500				500	650			
K-MX706050600				600	750			

*Οι διαστάσεις είναι ενδεικτικές και μπορούν να τροποποιηθούν κατόπιν παραγγελίας



ΥΔΡΑΥΛΙΚΟΙ ΚΥΛΙΝΔΡΟΙ ΜΟΝΗΣ ΕΝΕΡΓΕΙΑΣ ΜΕ ΑΚΡΑ

max ταχύτητα: 0,5m/s
 Πίεση Λειτουργίας: max 140bar
 Μέγιστη Πίεση: max 250bar
 Θερμοκρασία: -25°C

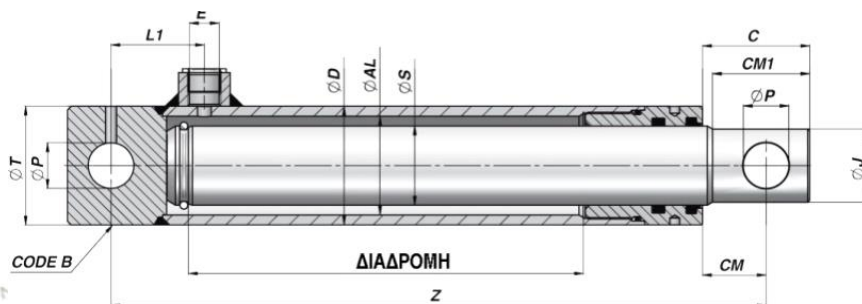

ΚΩΔΙΚΟΣ	Ø D	Ø AL	Ø S	ΔΙΑΔΡΟΜΗ	C	E	L1
K-MA504030200	50	40	30	200	42	3/8"	42
K-MA504030250				250			
K-MA504030300				300			
K-MA504030350				350			
K-MA504030400				400			
K-MA504030500				500			
K-MA605040200	60	50	40	200	54	3/8"	47
K-MA605040250				250			
K-MA605040300				300			
K-MA605040350				350			
K-MA605040400				400			
K-MA605040500				500			
K-MA605040600	70	60	50	600	74	3/8"	50
K-MA706050300				300			
K-MA706050400				400			
K-MA706050500				500			
K-MA706050600				600			

*Οι διαστάσεις είναι ενδεικτικές και μπορούν να τροποποιηθούν κατόπιν παραγγελίας

